




SAKRET PR 007

Powdered quick-bonding primer

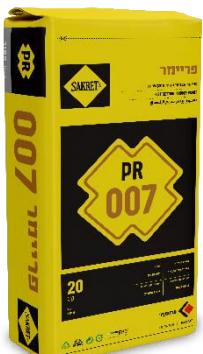

Color
Gray
Packaging and Weight
Sack, 20 kg
Number of Sacks per Pallet
84



Standards and Certifications

Work must comply with the guidelines of Israeli Standard 1555 part 3.

Work must comply with the guidelines of Israeli Standard 5566 part 2.

Green Label certified.

The product has undergone Life Cycle Analysis (LCA).

Holds a verified Environmental Product Declaration (EPD).

Main Properties and Uses

- Primer for cladding and flooring work.
- Suitable for application in new flooring systems over existing flooring.
- For covering the mesh on the back of natural stone and marble slabs before flooring and/or cladding work.
- Primer for extruded polystyrene (XPS) boards.
- Suitable for use on thermal bridges, as a cementitious layer on polystyrene boards before applying a base coat ("scratch coat").
- Suitable for substrates such as tin, metal, and colored plaster.
- Provides full bonding to the substrate.
- Fast drying (approximately 60 minutes), depending on weather conditions.
- For internal and external applications.
- The product is ready for use, requires only the addition of water.

Material Composition

Cement, graded aggregates, and special additives.



Typical Consumption

Approximately 20 m² per sack (about 0.7-0.9 kg/m²). Consumption may vary depending on substrate conditions and application method.

Technical Data

Workability Time	About 45 minutes
Tensile Adhesion Strength After 6 Hours	Greater than 0.5 MPa
Tensile Adhesion Strength after 28 Days	Greater than 1.0 MPa

*Data refers to laboratory conditions at 23°C ± 2°C and 50% ± 5% relative humidity

Application Method

Preparing the Mixture

- Pour 5.5-6.0 liters of clean water into a suitable and clean container, free of material residues, according to the type and speed of the electric mixer.
- Gradually add the entire contents of the bag and mix until a smooth, fine, lump-free paste is obtained.
- After waiting for about 3 minutes, mix again briefly.
- At this stage, the material is ready for use.

Despite the values above, water quantity may vary. In any case, ensure the workability level is appropriate for the product.

It is recommended to consult with the technical department.

Execution Method

- Apply a thin, uniform layer on the substrate using a stiff-bristle brush.
- Ensure full coverage of the surface.
- Ensure the material is dry to the touch before applying the next layer in the system.
- When using SAKRET PR 007 for mesh coverage on the back of natural stone slabs, wait 1.5-2 hours before proceeding with adhesion.

General Guidelines

- Store the product in a shaded, well-ventilated area.
- The material is suitable for use up to 9 months from the production date, provided it is stored in its original packaging under recommended conditions.
- Storage alongside gypsum-containing materials/products is strictly prohibited.
- Permitted application temperature range: 5°C - 35°C.
- All work must be carried out in accordance with applicable standards.
- Before performing the work, contact the company's representatives for guidelines and a technical data sheet.
- Since the material is alkaline, proper protection for skin and eyes is required. In case of contact, rinse immediately with running water.



Warning

It is strictly prohibited to add other materials, including gypsum and/or gypsum-containing products, to this product.

Warranty

The company's warranty is limited to the integrity and quality of materials only and does not replace the worker's responsibility. The worker must check the product and system's suitability for their needs, compatibility with other materials, and proper execution of the work. We reserve the right to update or change the data and recommendations without advance notice. The worker is responsible for checking the latest updates.

Translation Disclaimer

This product information has been translated from Hebrew to English for convenience only. In case of any discrepancy between the English translation and the original Hebrew language, the Hebrew version shall prevail. Therefore, we recommend relying solely on the information written in Hebrew! Furthermore, before using any product, you should consult the technical department for prior advice and support during use. The company accepts no responsibility for any damage or loss resulting from failure to comply with these instructions.

Updated: 11.2025